

Dresser Micro Logger 2

Pressure, Temperature and Pulse Data Logger



- **Logged data parameters available**
 - Minimum, maximum and average pressure on both the measurement transducer and the monitor transducer
 - Minimum, maximum and average temperature
 - Battery Voltage
 - Volume Data if Pulse Logging
- **Logs fully configurable in increments from 1 minute to 1 month**
- **Nominal 5 year battery life (standard alkaline sealed battery pack)**
- **7 Measurement and Monitor transducer options**
 - 30 PSI, 180 PSI and 350 PSI gauge
 - 30 PSI, 180 PSI, 450 PSI and 1000 PSI absolute
- **Fully compatible with both the GSM and Line Micro modems. Email capability via the Dresser GSM/GPRS modem**

The Dresser Micro Logger 2 is an extension of the successful Micro Series product line. It utilizes the same user friendly Micro Corrector User Terminal Software and communication cables and, is designed to be installed on any part of the distribution or transmission system requiring accurate, safe, and reliable data logging and network status monitoring.

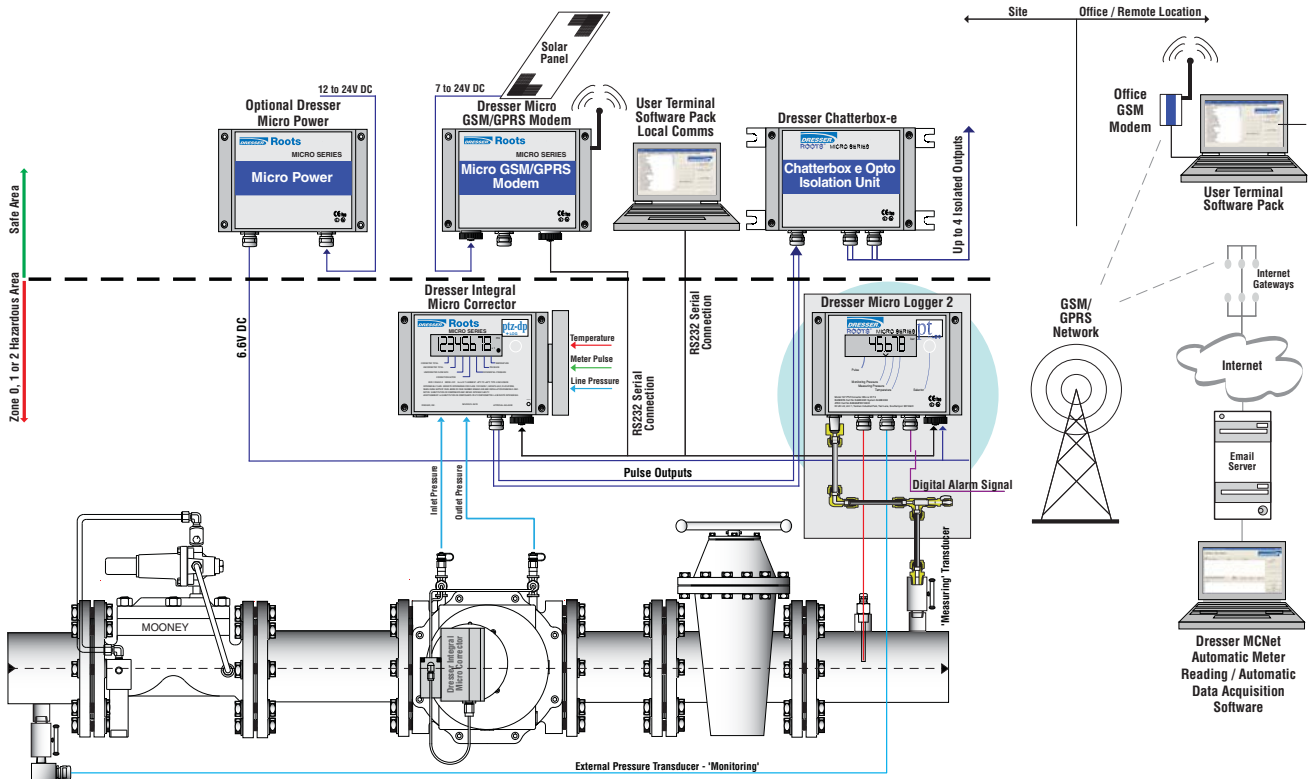


Figure 1: Systems Schematic

Technical Specifications

PRESSURE MEASUREMENT RESOLUTION

- Pressure:** 0.01 psi (1 mbar)
- Accuracy:** $\pm 0.25\%$ reading
- Long Term Stability :** 0.1% per year (non-cumulative)
- Measurement Resolution:** 0.01 psi (1 mbar)

GAUGE TRANSDUCERS

- 0-30 psi (2 bar)
- 0-180 psi (12 bar)
- 0-350 psi (24 bar)

ABSOLUTE TRANSDUCERS

- 0-30 psi (2 bar)
- 0-80 psi (12 bar)
- 0-450 psi (30 bar)
- 0-1000 psi (70 bar)

TEMPERATURE MEASUREMENT RESOLUTION

- Temperature:** 0.1 F° (0.1 C°)
- Accuracy:** ± 0.9 F° (0.5 C°)
- Operating Temperature Range:** -40 °F to +140 °F (-40 °C to +60 °C)
- Long Term Stability:** 0.3 F° per year (0.2 C°)
- Temperature Probe Type:** PT100 (Class A) 4-wire with armored cable

TEMPERATURE PROBES

- 2" or 8-1/4" probe insertion lengths with either 5 foot or 10 foot armored cable lengths

BATTERY

- Sealed Alkaline Pack:** 5 years nominal life with 4 size C alkaline cells
- Low Battery Reserve:** 2 months minimum

INPUTS

- Volume:** Reed Switch; Solid State L.F. Weigand Pulse Type
- Pressure:** Proprietary semiconductor strain gauge
- Temperature:** ITS-90 Platinum 100 Ω RTD
 $\alpha=0.00385$

LCD DISPLAY

- User selectable parameters

PULSE OUTPUTS

- Corrected, Uncorrected and Alarm/Fault**
- Loop Voltage:** 5-15 Vdc
- Loop Current:** 10 mA maximum
- Pulse Width:** User selectable options of 125, 187, or 312 mS
- On/Off Resistance:** $<10_{_}/> 10M\Omega$
- Isolation:** 2,500 Vdc

ENVIRONMENT

- Storage Temperature:** -58 °F to +176 °F (-50 °C to +80 °C)
- Humidity:** Up to 95% sustained outdoor exposure

ENCLOSURE

- NEMA 4X (IP66)

INTRINSIC SAFETY

- Designed Intrinsically Safe for Class I, Division 1, Groups C and D
- Zone 0:** EEX ia IIC T4 Tamb = -40 °C to +60 °C
- Class-I, Division-1, Group C and D:** BAS98ATEX 1083

ELECTROMAGNETIC/RADIO FREQUENCY IMMUNITY

- FCC Class B:** Meets EMI/RFI immunity at 10 V/m, 0.1 to 1,000 MHz
- EN50081-1 and EN5088-2
- Other:** ISO-9001, CE Mark



Figure 2: Dresser Micro Power and Micro Modem available for use with the Micro Logger 2.

Roots Meters & Instruments Dresser, Inc.

16240 Port Northwest Drive
Houston, Texas 77041-2645 USA
Inside US Ph: 800.521.1114 Fax: 800.335.5224
Outside US Ph: 832.590.2303 Fax: 832.590.2494

